




MOBILE HYDROTECH™ DISC FILTER FOR TURBIDITY & TSS REDUCTION

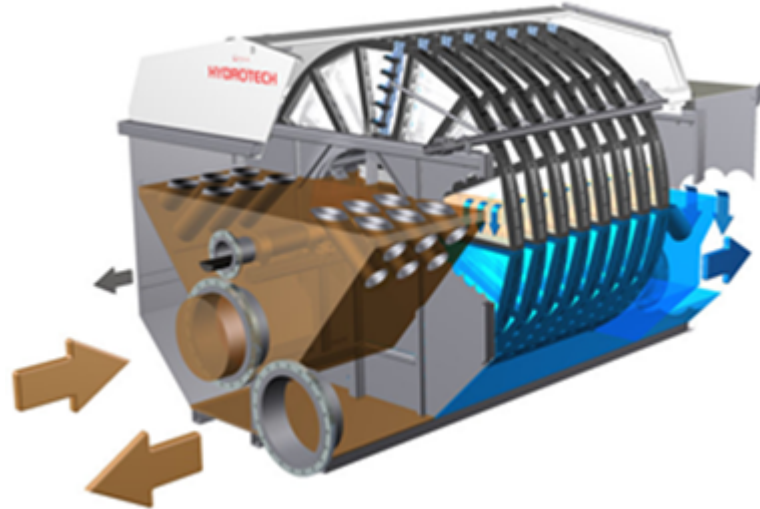

- Hydrotech Disc Filter HSF2212-1C Compact Series
- Water Clarification and Filtration for Turbidity, Total Suspended Solids, & Phosphorus Reduction
- Polishing flows in excess of 3000 GPM
- Disc Filter Skid: 16'L x 8.5'W x 8.5'H (once removed from trailer and lid closed)
 - 9,500 lbs. dry / 38,000 lbs. wet
- 10 - 100 micron filter panels
- Typical Connections (150 lb. flange)
 - Raw Water Inlet.....20"
 - Filtered Water Outlet.....16"
 - Separate Bypass Outlet.....16"
 - Dirty Backwash Outlet.....6"
 - Tank drain.....2" (various)
 - Service water..... garden hose
- Power Requirement: 480 VAC/3 Phase/40 AMP
- Effluent level weirs are ~ 38" above tank bottom. If more height is needed others can lift up the disc filter and place timbers between the deck and bottom of the tank.

Veolia Water Technologies
945 South Brown School Rd • Vandalia, OH 45377
tell. +1 (704)-650-0881
michael.reyes@veolia.com
www.veoliawatertech.com